

21. TWISTER MT.GYM-021

Dimensions:	1255mm x 1700mm x 1700mm
Minimum space:	ø4,91
Safety surface area:	17m ²
Free height of fall:	2m
Installation surface:	concrete, stone, sand, turf
Foundation depth:	300mm
Spare parts:	available at the manufacturer
Age range:	no limits (growth restrictions)
Certificate of conformity with the safety standards:	PN-EN 16630





Instructions:

Grab the rail with both hands and place your feet on the platform. Start twisting motion from left to right keeping your back straight.

Material and design specifications:

Treads made of aluminium, covered with polyethylene ABS board. Rail made of powder coated steel. Supporting pole made of steel tube ended at the bottom with mounting flange. Movable connections made with the use of rolling bearings. Installation with the use of stainless steel screws. Holes sealed at the endings with steel elements. Installed permanently in the ground.

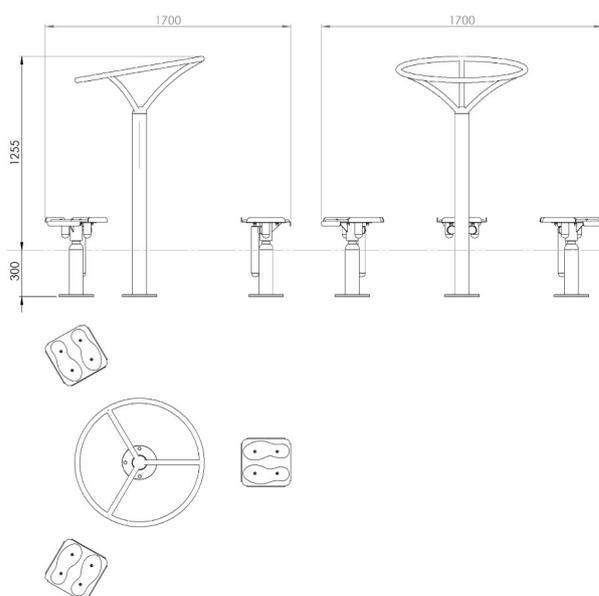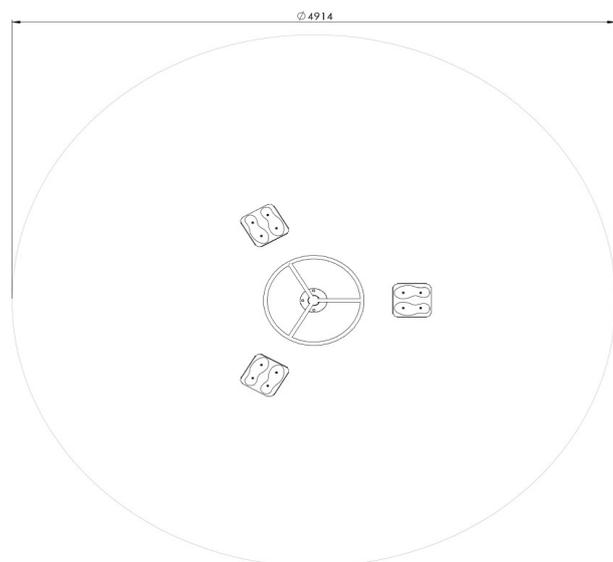

Safety surface: 17m²
Minimum space: ø4,91

Dimensions: 1255mm x 1700mm x 1700mm